


**Door Construction:**

Raised Panel Profile

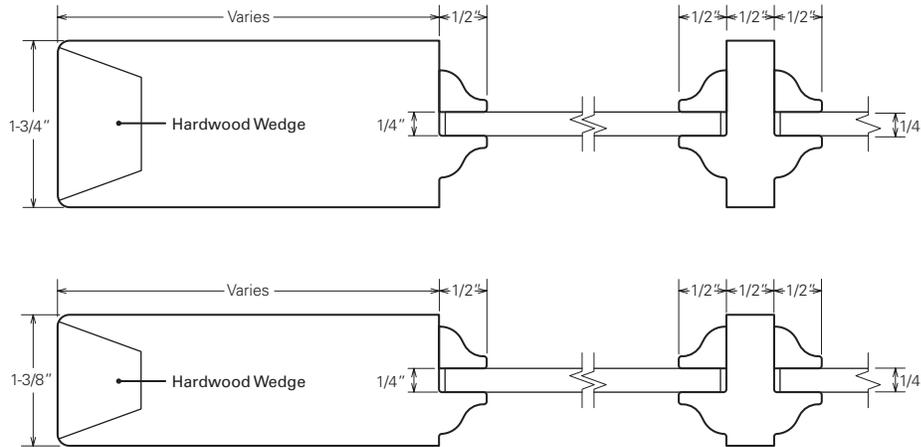

**Product Features & Specifications:**

<b>Thickness</b>	1-3/8" or 1-3/4"
<b>Maximum Size</b>	Single: 4'0 x 8'0 Pair: 8'0 x 8'0 <i>Taller sizes available on a custom basis</i>
<b>Door Material</b>	Solid MDF
<b>Construction Method</b>	Stile and rail
<b>Finish</b>	Factory Prime
<b>Available Styles</b>	Any standard or custom design that meets the specifications described in this document. <i>See TruStile catalog for all standard styles</i>
<b>Available Profiles</b>	8 standard sticking options 4 standard panel options Custom options also available <i>See TruStile catalog for more details</i>
<b>Maximum Glass Size</b>	Varies based on size and style
<b>Panel Construction</b>	<i>doors with combined panel &amp; glass</i>
Raised Panel Thickness	5/8" or 7/8"
Flat Panel Thickness	3/8" or 1/2"

<b>Panel Size</b>	<i>doors with combined panel &amp; glass</i>	
Minimum Panel Size		No minimum
Maximum Panel Size		No minimum
<b>Stock Dimensions</b>		
Top Rail		5"
Bottom Rail		8-1/4" <i>Can be built larger to meet ADA requirements</i>
Stiles		Varies based on size and style
<b>Acoustic Rating</b>		N/A
<b>Standards</b>		ASTM E-152, NFPA 80, NFPA 252, UBC7-2-1997/UL10C, UBC7-2-1997/UL10B
<b>Hardware Configurations</b>		Pursuant to NFPA80, consult factory for approved configurations
<b>Warranty</b>		Limited lifetime warranty

\* For more information visit the TruStile website at: [www.trustile.com](http://www.trustile.com) or call 888.286.3931  
Specifications are subject to change. Confirm with TruStile before ordering.