


Door Construction:

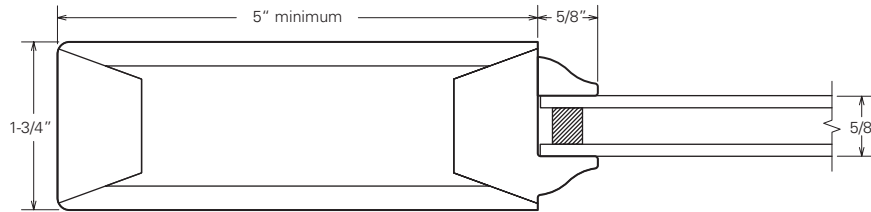

Product Features & Specifications:

Thickness	1-3/4"	Panel Size	
Maximum Size	Single: 4'0 x 8'0 Pair: 8'0 x 8'0 <i>Taller sizes available on a custom basis</i>	<i>doors with combined panel & glass</i>	
Door Material	MDF with engineered stiles and rails	Minimum Panel Size	No minimum
Construction Method	Stile and rail	Maximum Panel Size	No maximum
Finish	Factory Prime	Maximum Glass Size	N/A
Available Styles	Any standard or custom design that meets the specifications described in this document. <i>See TruStile catalog for all standard styles</i>	Stock Dimensions	
Available Profiles	10 standard sticking options 4 standard panel options Custom options also available <i>See TruStile catalog for more details</i>	Top Rail	5"
Panel Construction		Bottom Rail	8-1/4" <i>Can be built larger to meet ADA requirements</i>
<i>doors with combined panel & glass</i>		Stiles	5"
Raised Panel Thickness	1-3/16"	Acoustic Rating	N/A
Flat Panel Thickness	11/16"	Standards	ASTM E-152, NFPA 80, NFPA 252, UBC7-2-1997/UL10C, UBC7-2-1997/UL10B
		Hardware Configurations	Pursuant to NFPA80, consult factory for approved configurations
		Warranty	Limited lifetime warranty

* For more information visit the TruStile website at: www.trustile.com or call 888.286.3931
Specifications are subject to change. Confirm with TruStile before ordering.