


**Door Construction:**

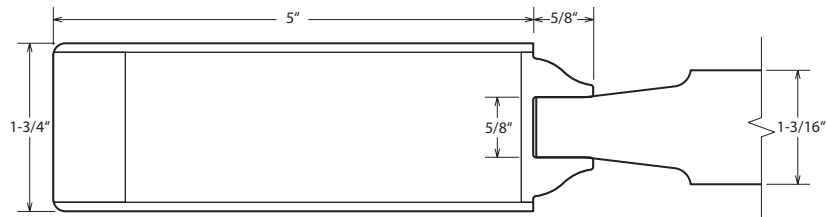

**Product Features & Specifications:**

<b>Thickness</b>	1-3/4"	<b>Panel Size</b>	
<b>Maximum Size</b>	Single: 4'0 x 8'0 Pair: 8'0 x 8'0 <i>Taller sizes available on a custom basis</i>	Minimum Panel Size	No minimum
<b>Door Material</b>	MDF with engineered stiles and rails	Maximum Panel Size	No maximum
<b>Construction Method</b>	Stile and rail	<b>Maximum Glass Size</b>	N/A
<b>Finish</b>	Factory Prime	<b>Stock Dimensions</b>	
<b>Available Styles</b>	Any standard or custom design that meets the specifications described in this document. <i>See TruStile catalog for all standard styles</i>	Top Rail	5"
<b>Available Profiles</b>	10 standard sticking options 4 standard panel options Custom options also available <i>See TruStile catalog for more details</i>	Bottom Rail	8-1/4" <i>Can be built larger to meet ADA requirements</i>
<b>Panel Construction</b> <i>doors with combined panel &amp; glass</i>		Stiles	5" minimum
Raised Panel Thickness	1-3/16"	<b>Acoustic Rating</b>	Up to 34 STC rating
Flat Panel Thickness	11/16"	<b>Standards</b>	ASTM E-152, NFPA 80, NFPA 252, UBC7-2-1997/UL10C, UBC7-2-1997/UL10B
		<b>Hardware Configurations</b>	Pursuant to NFPA80, consult factory for approved configurations
		<b>Warranty</b>	Limited lifetime warranty

\* For more information visit the TruStile website at: [www.trustile.com](http://www.trustile.com) or call 888.286.3931  
Specifications are subject to change. Confirm with TruStile before ordering.