


Door Construction:

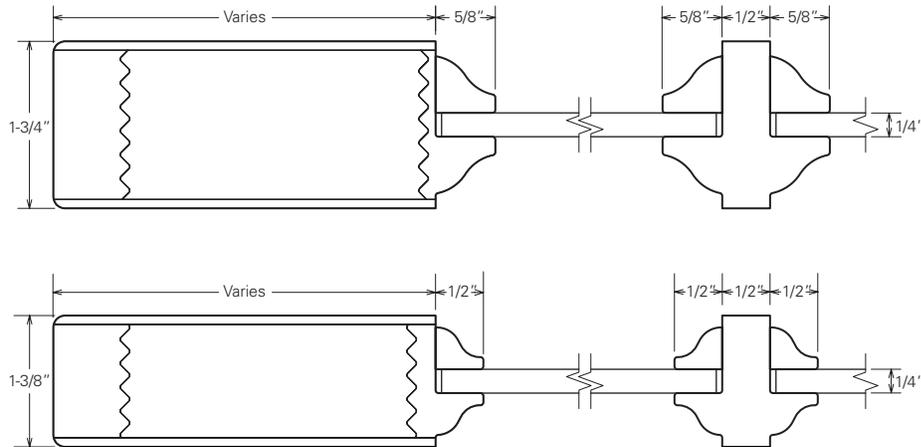

Product Features & Specifications:

Thickness	1-3/8" or 1-3/4"	Panel Size	<i>doors with combined panel & glass</i>
Maximum Size	Single: 4'0 x 8'0 Pair: 8'0 x 8'0 <i>Taller sizes available on a custom basis</i>	Minimum Panel Size	No minimum
Door Material	Wood with engineered stiles and rails	Maximum Panel Size	No minimum
Construction Method	Stile and rail	Stock Dimensions	
Finish	Unfinished	Top Rail	5"
Available Styles	Any standard or custom design that meets the specifications described in this document. <i>See TruStile catalog for all standard styles</i>	Bottom Rail	8-1/4" <i>Can be built larger to meet ADA requirements</i>
Available Profiles	8 standard sticking options 4 standard panel options Custom options also available <i>See TruStile catalog for more details</i>	Stiles	Varies based on size and style
Maximum Glass Size	Varies based on size and style	Acoustic Rating	N/A
Panel Construction		Standards	ASTM E-152, NFPA 80, NFPA 252, UBC7-2-1997/UL10C, UBC7-2-1997/UL10B
<i>doors with combined panel & glass</i>		Hardware Configurations	Pursuant to NFPA80, consult factory for approved configurations
Raised Panel Thickness	3/4"	Warranty	Limited lifetime warranty
Flat Panel Thickness	1/2" or 5/8"		

* For more information visit the TruStile website at: www.trustile.com or call 888.286.3931
Specifications are subject to change. Confirm with TruStile before ordering.