


TRUSTILE WOOD ENTRY SYSTEMS



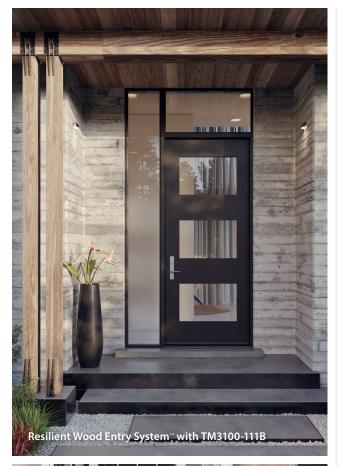

Elevate Every Entry

In collaboration with our parent company, Marvin®, we have engineered and extensively tested a family of premium residential wood entry systems that set the tone for the whole home.

Design Forward

We offer more design styles, sizes, and options than anyone else so our customers can create without constraint. The Resilient Wood Entry System™ takes your home to the next level with the most durable painted construction without sacrificing any design options. Our Reserve Wood Entry System™ offers the beauty of stain-grade wood to match the refined elegance of your home.

Materials Matter

TruStile wood entry systems use innovative Accoya® and Tricoya® to provide exception stability and durability. All of our entry systems come with industry-leading warranty coverage.



Learn more at:

www.trustile.com/elevate












Resilient Wood Entry System™

The Resilient Wood Entry System sets the tone of quality for the whole home using the most durable painted construction without sacrificing any design options.

- Engineered with resilient
 Accoya®, an acetylated wood
 product, which brings unprecedented
 reliability and durability to wood.
- Tricoya® top layers provide exceptional stability, durability and paintability, for outdoor applications.
- Most configurations delivered pre-hung with an Accoya built jamb and a premium prime finish, ready to paint to match your design.
- 10-year warranty with limited and no-overhang applications, depending on system design specifications, for both inswing and outswing units.

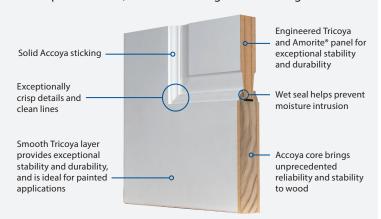

Reserve Wood Entry System™

The Reserve Wood Entry System elevates the refined elegance of your home with the beauty of stained natural wood.

 Engineered with a laminated veneer lumber (LVL) core and Tricoya® layers to provide exceptional stability and durability.



- 10 natural wood species available with an extensive collection of premium factory stain options.
- Premium appearance standards ensure industryleading grain and color matching.
- 5-year limited warranty with industry standard overhang requirements for both inswing and outswing units.

